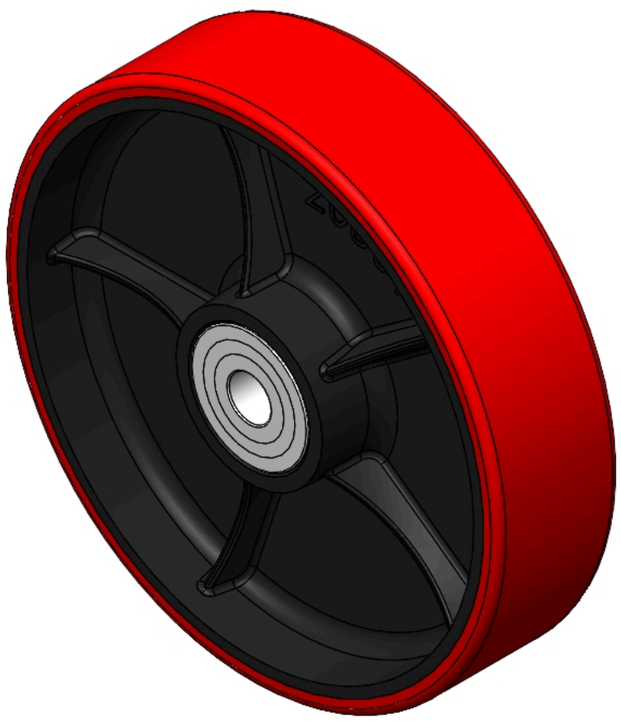

Picture may differ from original product




PU Series

# Wheel Diameter × Wheel Width 200 x 49mm

YJ-12033308200771 Copy model no.

| Wheel Diameter(D) | Load Capacity (Dynamic) | Wheel Bearing |
|---|---|---|
| **200mm** | **700kgs** | **Ball Bearing** |

- Excellent Floor Surface Preservation and wear resistance, low noise.
- Excellent Hydrolysis Resistance.
- Suitable for tropical regions and humid working environments.
- PU Red
- Wheel Center: cast iron core
- Wheel Tread: High-quality polyurethane
- Bearing: Ball bearing

Product descriptions are for reference only. The actual product shall prevail.

3D Drawing Request

3D drawings are for members only. Please log in to download.

## Product Data Sheet

Metric | Imperial

| | | | |
|---|---|---|---|
| Wheel Diameter(D) | **200mm** | Wheel Width(T2) | **49mm** |
| Wheel Bearing | **Ball Bearing** | Axle Bore(d) | **20mm** |
| Axle Bore(S) | — | Bearing Bore Depth(t) | — |
| Hub Lenth(T1) | **50mm** | Hardness Of Tread | **92±5° Shore A** |
| Load Capacity (Dynamic) | **700kgs** | Load Capacity (Static) | **1050kgs** |
| Temperature | **-20°C to +70°C** | Electrical Conductivity | **N/A** |
| Anti-Static | **N/A** | Weight | **2.67kgs** |
| Standard | **ISO22883** | | |

* For any deviation between metric and imperial spec, please refer to the metric spec.

## Performance

**Rolling Smoothness**
Max. 5 points Score: 3

**Quiet Operation**
Max. 5 points Score: 4

**Floor Surface Preservation**
Max. 5 points Score: 4

## Downloads

3D **1233-CN-YJ2026111701-d261117085436.rar**
3D drawings are for members only. Please log in to download.



© 2026 DERSHENG CO., LTD. All rights reserved.