


Picture may differ from original product

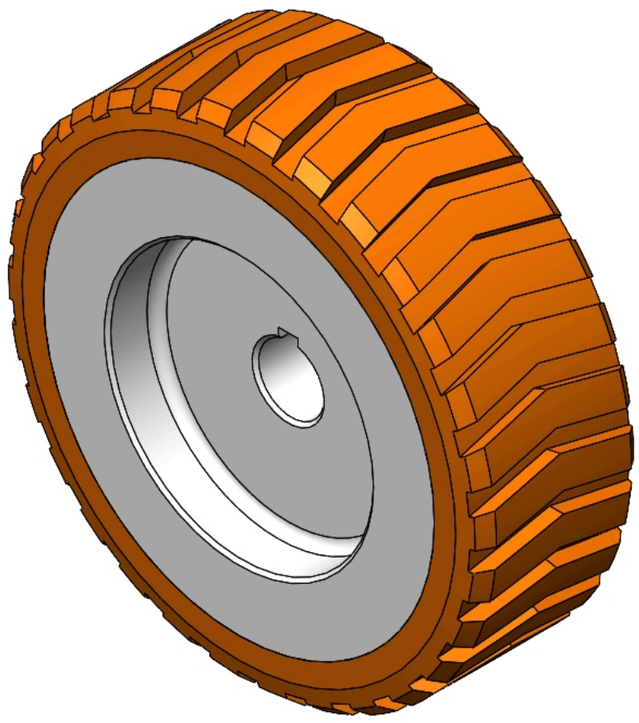


HPU Series

Wheel Diameter × Wheel Width 150 x 50mm

YJ-12037706200201 Copy model no.

Wheel Diameter（D）	Tread Pattern	Load Capacity at 6 km/h
150mm	—	**493kgs**

- Excellent mechanical properties and abrasion resistance
- Excellent chemical resistance、Resistance to corrosive substances
- Suitable for forklifts、Electric stackers、AGV automation and floor-scrubber applications
- HPU，Orange-yellow，Machined V-grooved surface
- Increases floor traction，Effectively improves slip resistance
- Inner bushing：Cast iron core

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet

Metric | Imperial

Wheel Diameter（D）	**150mm**	Wheel Width（T2）	**50mm**
Wheel installation — Hub Lenth (T1)	**32mm**	Wheel Mounting Bore Diameter	**20mm**
Keyway Width	**6mm**	Wheel Keyway Depth (H)	**22.8mm**
Load Capacity (Static)	**870kgs**	Load Capacity at 4 km/h	**580kgs**
Load Capacity at 6 km/h	**493kgs**	Load Capacity at 10 km/h	**406kgs**
Load Capacity at 16 km/h	**232kgs**	Hardness Of Tread	**92±5° Shore A**
Temperature	**-20°C to +70°C**	Tread Pattern	**—**
Wheel centre/ rim		Non-Marking	**Y**
Conductive	**N/A**	Anti	**N/A**
Weight	**3.68kgs**	Standard	**ISO22883**

* For any deviation between metric and imperial spec, please refer to the metric spec.

Performance

Rolling Smoothness
Max. 5 points Score: 5

Quiet Operation
Max. 5 points Score: 4

Floor Surface Preservation
Max. 5 points Score: 5

© 2026 DERSHENG CO., LTD. All rights reserved.