


Picture may differ from original product

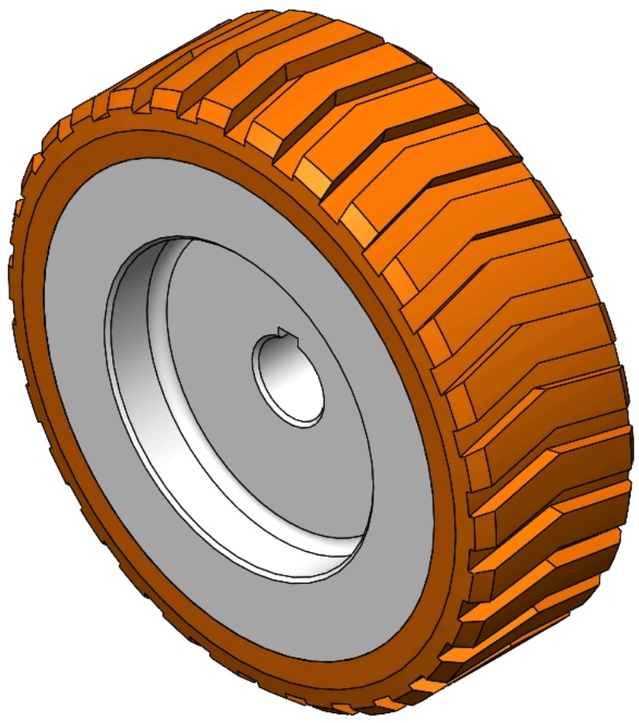


HPU Series

Wheel Diameter × Wheel Width 150 x 50mm

YJ-12037706200201 Copy model no.

Wheel Diameter（D）	Tread Pattern	Load Capacity at 6 km/h
6 "	V纹	1087lbs

- Excellent mechanical properties and abrasion resistance
- Excellent chemical resistance、Resistance to corrosive substances
- Suitable for forklifts、Electric stackers、AGV automation and floor-scrubber applications
- HPU，Orange-yellow，Machined V-grooved surface
- Increases floor traction，Effectively improves slip resistance
- Inner bushing：Cast iron core

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet

Metric | Imperial

Wheel Diameter（D）	6 "	Wheel Width（T2）	2 "
Wheel installation — Hub Lenth (T1)	1-5/16 "	Wheel Mounting Bore Diameter	13/16 "
Keyway Width	1/4 "	Wheel Keyway Depth (H)	22.8
Load Capacity (Static)	1918lbs	Load Capacity at 4 km/h	1279lbs
Load Capacity at 6 km/h	1087lbs	Load Capacity at 10 km/h	895lbs
Load Capacity at 16 km/h	511lbs	Hardness Of Tread	92±5° Shore A
Temperature	-4°F to +158°F	Tread Pattern	V纹
Wheel centre/ rim		Non-Marking	Y
Conductive	N/A	Anti	N/A
Weight	8.1lbs	Standard	ISO22883

* For any deviation between metric and imperial spec, please refer to the metric spec.

Performance

Rolling Smoothness
Max. 5 points Score: 5

Quiet Operation
Max. 5 points Score: 4

Floor Surface Preservation
Max. 5 points Score: 5

© 2026 DERSHENG CO., LTD. All rights reserved.