
Product Data Sheet

# 1115 Spring-loaded Caster Series (Regular)

PU (red round) Wheel Diameter x Wheel Width 125 x 45mm

EAN

KS-11150400332261

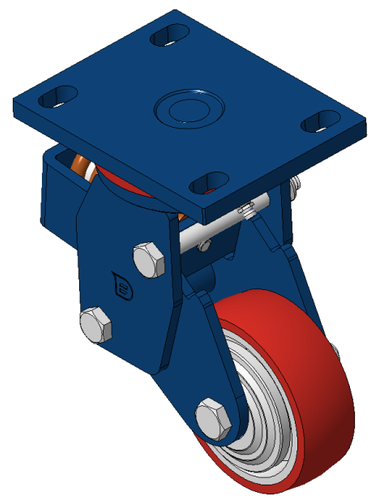

Picture may differ from original product

Spring-loaded, movable Caster with Welded Caster Fork and blue paint finish.
Mounting Type - Top Plate, 110x75 Bolt Hole Spacing.
Cast Iron Wheel Center with High Quality Polyurethane Wheel Tread, Cast Iron red.
Bearings: Ball Bearings.

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

## Technical Data


◉ Imperial ○ Metric

| | |
|---|---|
| Wheel Diameter | 4 " |
| Wheel Width | 1-3/8 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 5-9/16 " x 4-3/8 " |
| Bolt Hole Spacing | 4-5/16 " x3” |
| Plate Hole | 7/8 " 9/16 " |
| Offset | 1-13/16 " |
| Swivel Interference | 7-5/8 " |
| Overall Height | 7-15/16 " |
| Swivel Radius | 3-7/8 " |
| Hardness Of Tread | 92±5° Shore A |
| Load Capacity (Dynamic) | 441lbs |
| Load Capacity (Static) | 661lbs |
| Temperature | -4°F to +158°F |
| Fork Type | Swivel Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 12.1lbs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ● ● ● ○ ○ |
| Operating Noise | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

## Dimensions

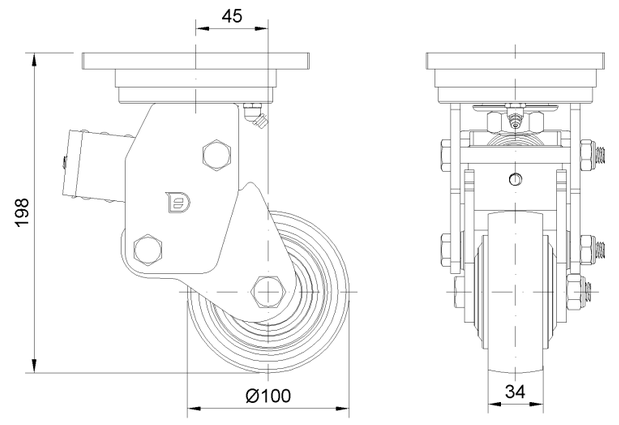


## Mounting

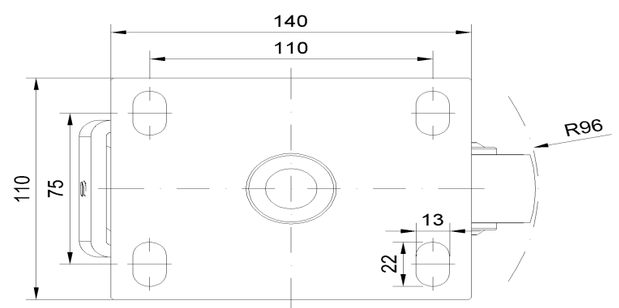


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com