
Product Information Sheet

# 1152 Anti-Friction Caster Series

QPU (Brown round) Wheel Diameter × Wheel Width 150 x 42mm

EAN

KS-11520600532411

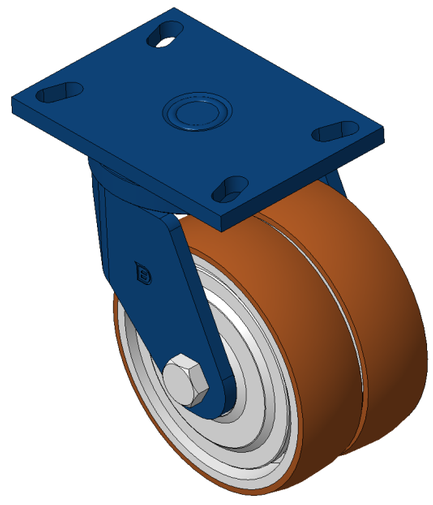

Picture may differ from original product

Portable Casters, Welded Caster Fork
Blue painted finish, Mounting Type - Top Plate, Bolt Hole Spacing 129.4x73.8
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown
Bearings—Ball Bearings

Wheel Tread: Hhigh-Quality Polyurethane

Wheel Center: Iron core/Cast iron core

Drawings are for reference only and may differ from the product

## Technical Data


◉ Imperial ○ Metric

| | |
|---|---|
| Wheel Diameter | 6 " |
| Wheel Width | 1-11/16 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 6-3/8 " x 4-1/2 " |
| Bolt Hole Spacing | 5-1/8“x2-7/8” |
| Plate Hole | 1-1/16 " x 9/16 " |
| Offset | 1-15/16 " |
| Swivel Interference | 9-1/8 " |
| Overall Height | 7-9/16 " |
| Swivel Radius | 5-3/16 " |
| Hardness Of Tread | 92±5° Shore A |
| Load Capacity (Dynamic) | 992lbs |
| Load Capacity (Static) | 1488lbs |
| Temperature | -4°F to +158°F |
| Fork Type | Swivel Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 11.8lbs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ● ● ● ● ● |
| Operating Noise | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

## Dimensions

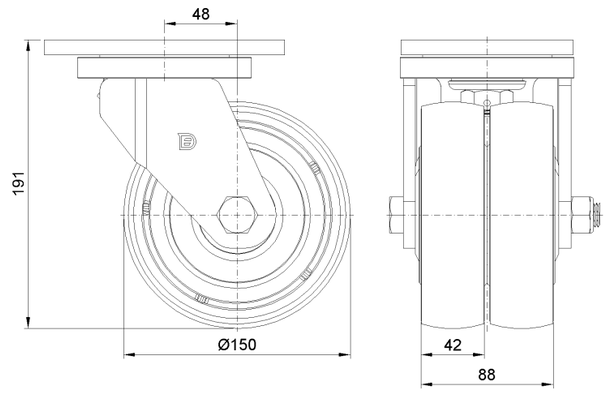


## Mounting

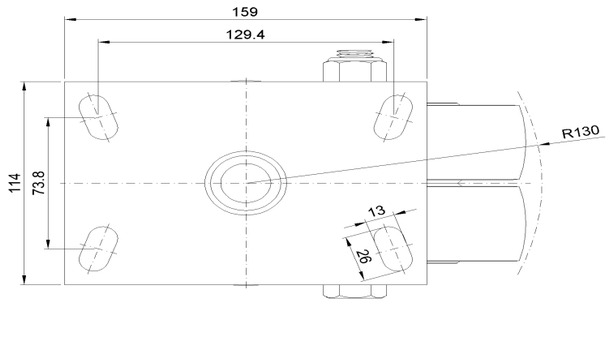


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com