
Product Data Sheet

1152 Anti-Friction Caster Series

QPU (brown flat) Wheel Diameter x Wheel Width 305x 70mm

EAN

KS-11521200532111

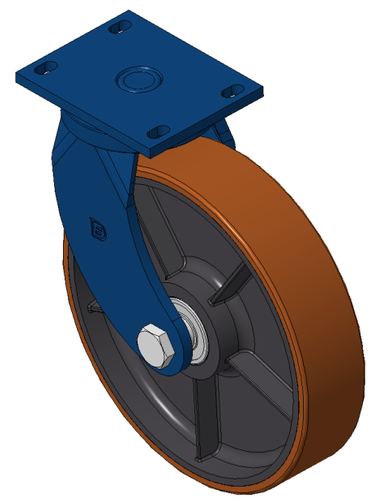

Picture may differ from original product

Swivel Caster with Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 140x85 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

Technical Data


◉ Imperial ○ Metric

Wheel Diameter	12-1/16 "
Wheel Width	2-13/16 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	6-5/8 " x 5-3/16 "
Bolt Hole Spacing	5-1/2 " x3-3/8 "
Plate Hole	7/8 " x 9/16 "
Offset	3-3/16 "
Swivel Interference	18-3/4 "
Overall Height	14 "
Swivel Radius	9-1/2 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	4960lbs
Load Capacity (Static)	7441lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	49.2lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

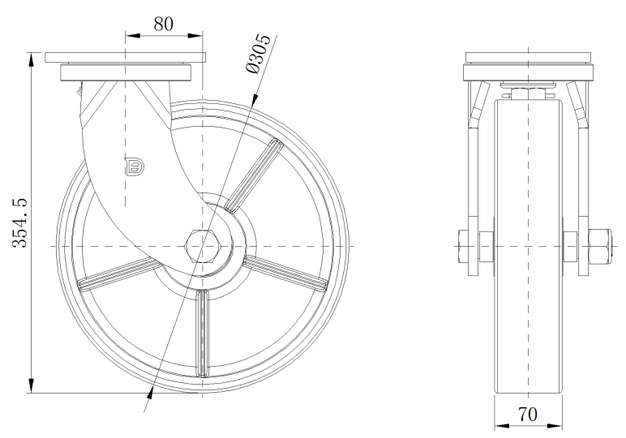

Mounting

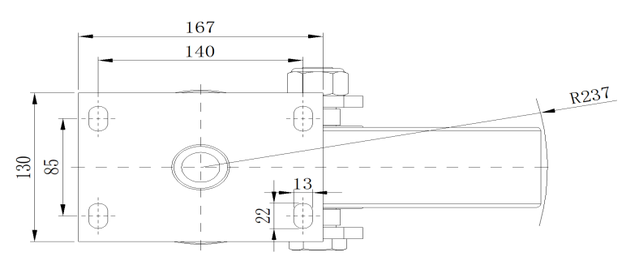

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com