
Product Data Sheet

1130 Medium Duty General Purposes Caster Series

AQPU (grey) Wheel Diameter × Wheel Width 75 x 31mm

EAN

TW-4113003002030

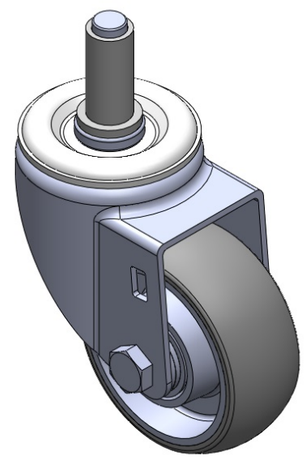

Picture may differ from original product

Swivel Caster with Riveted Stamping Fork—Ø11x38L Zine-Plated, Mounting Type - Cylindrical Stem, brass buckle, and plastic sleeve Aluminum core with High Quality Polyurethane Wheel Tread Gray, Bearing—Ball Bearings.

Wheel tread: high quality polyurethane

Wheel Center: aluminum core

Drawings are for reference only and may differ from the product

Technical Data


◉ Metric ○ Imperial

Wheel Diameter	75mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Diameter	11mm
Stem Hole Spec	38mm
Offset	35mm
Swivel Interference	146mm
Overall Height	102mm
Swivel Radius	73mm
Hardness Of Tread	77±5° Shore A
Load Capacity (Dynamic)	160kgs
Load Capacity (Static)	240kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.50kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

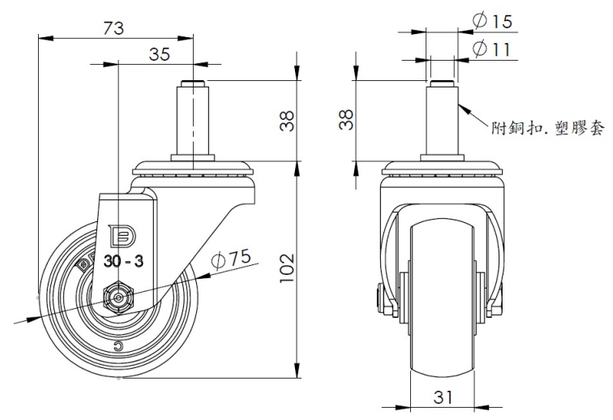

Mounting

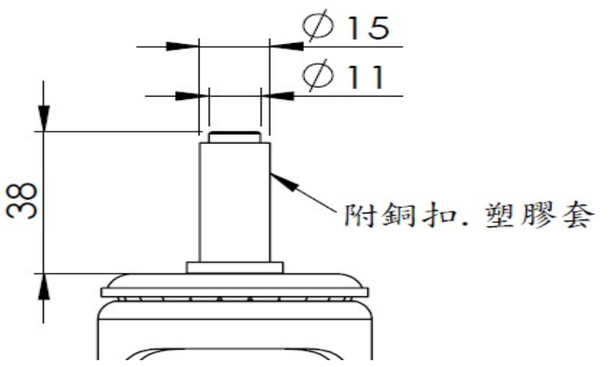

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com