
Product Data Sheet

# 1139 Medium Duty General Purposes Caster Series

PU (red flat) Wheel Diameter x Wheel Width 75 × 32mm

EAN

YJ-11390300331013

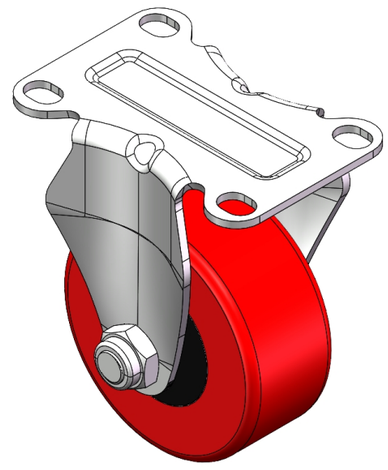

Picture may differ from original product

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.
Zine-Plated, Mounting Type - Top Plate.
Cast Iron core with High Quality Polyurethane Wheel Tread.
Red color. Bearings: Ball Bearings.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

## Technical Data


◉ Imperial ○ Metric

| | |
|---|---|
| Wheel Diameter | 3 " |
| Wheel Width | 1-5/16 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 3-11/16 " x 2-1/2 " |
| Bolt Hole Spacing | 3 " x 1-13/16 " |
| Plate Hole | 1/2 " x 23/64 " |
| Overall Height | 4-3/16 " |
| Hardness Of Tread | 93±5° Shore A |
| Load Capacity (Dynamic) | 198lbs |
| Load Capacity (Static) | 298lbs |
| Temperature | -4°F to +158°F |
| Fork Type | Rigid Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 1.7lbs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ● ● ● ○ ○ |
| Operating Noise | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

## Dimensions

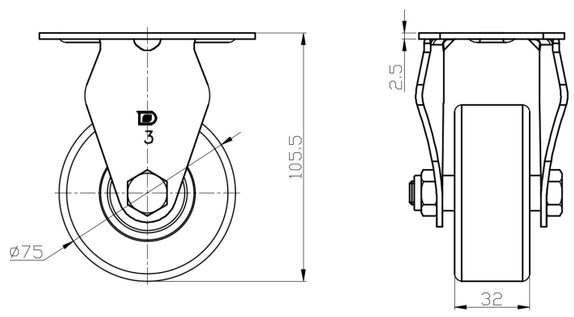


## Mounting

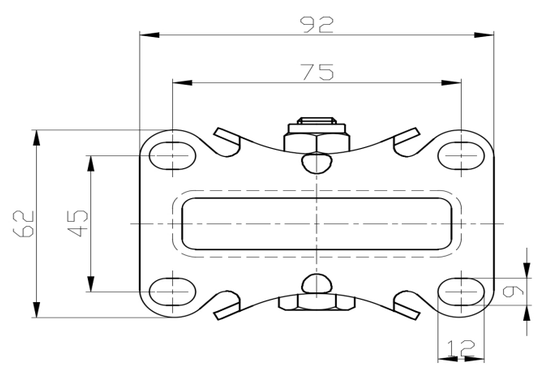


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com