
# AMR/AGV- 7 Shock Absorbing Caster (Medium Duty)

Resolute Wheel Diameter × Wheel Width 100 x 34mm

EAN

KS-11650407452023

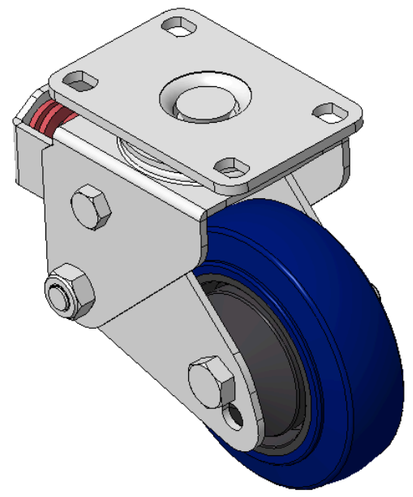

Picture may differ from original product

Drawings are for reference only and may differ from the product

## Technical Data


◉ Metric ○ Imperial

| | |
|---|---|
| Wheel Diameter | 100mm |
| Wheel Width | 34mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 95 x 65mm |
| Bolt Hole Spacing | 75 x 45mm |
| Plate Hole | 12 x 9mm |
| Offset | 32mm |
| Swivel Interference | 170mm |
| Overall Height | 135mm |
| Swivel Radius | 85mm |
| Hardness Of Tread | 72±5° Shore A |
| Load Capacity (Dynamic) | 110kgs |
| Load Capacity (Static) | 165kgs |
| Temperature | -20°C to +60°C |
| Fork Type | Swivel Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 1.45kgs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ●●●●● |
| Operating Noise | ●●●●● |
| Floor Surface Preservation | ●●●●● |

## Dimensions

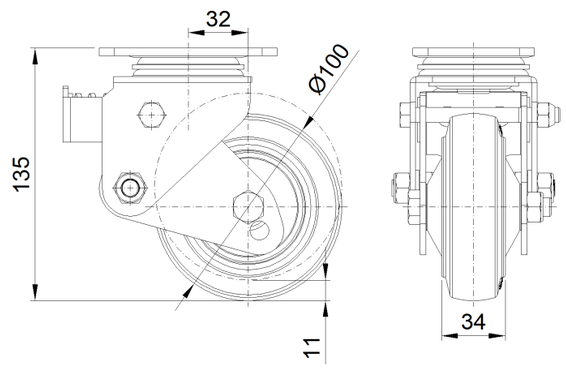


## Mounting

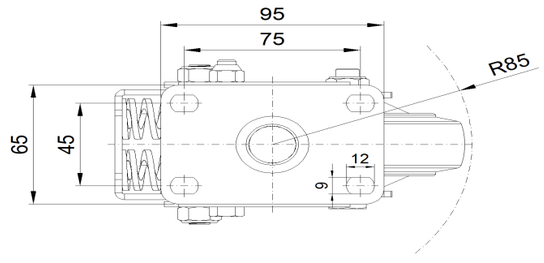


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com